

Dehumidifier CONSORB DC-10



0,6 kg/h

Dehumidifying capacity
at 20°C / 60%RH


190 m³/h

Dry air flow



- Washable rotor
- No desiccant carry-over
- Stainless steel chassis

- Self-regulating heater
- Easy to maintain
- Long lifetime

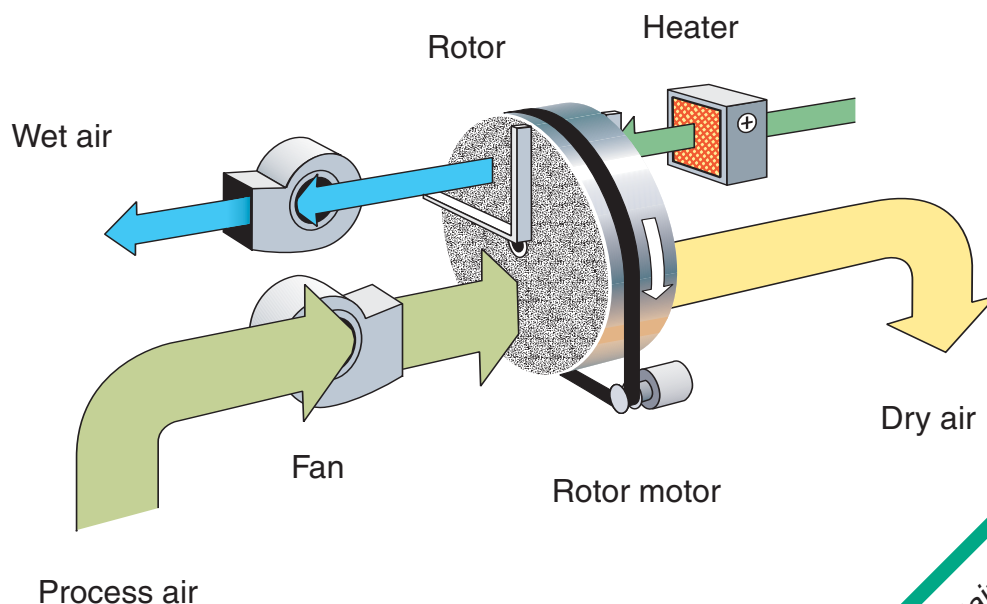

Contains the SSCR rotor -
one step ahead in
adsorption
technology

TECHNICAL DATA

Dehumidifier model DC-10


| | |
|------------------------------|-----------------------|
| Nominal capacity * | 0,6 kg/h |
| Dry airflow** | 190 m ³ /h |
| Normal wet air flow ** | 60 m ³ /h |
| Heater current *** | 4,5 A |
| Maximum electric consumption | 1,3 kW |
| Supply fuse 230V / 50Hz | 10 A |
| Weight | 15 kg |

* Valid for inlet conditions 20°C/ 60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.

** Volume flow for density 1,20 kg/m³ Free blowing

*** Thanks to the thermistor heater, the power can be steplessly varied by controlling the wet air flow.

CORRECTION DIAGRAM

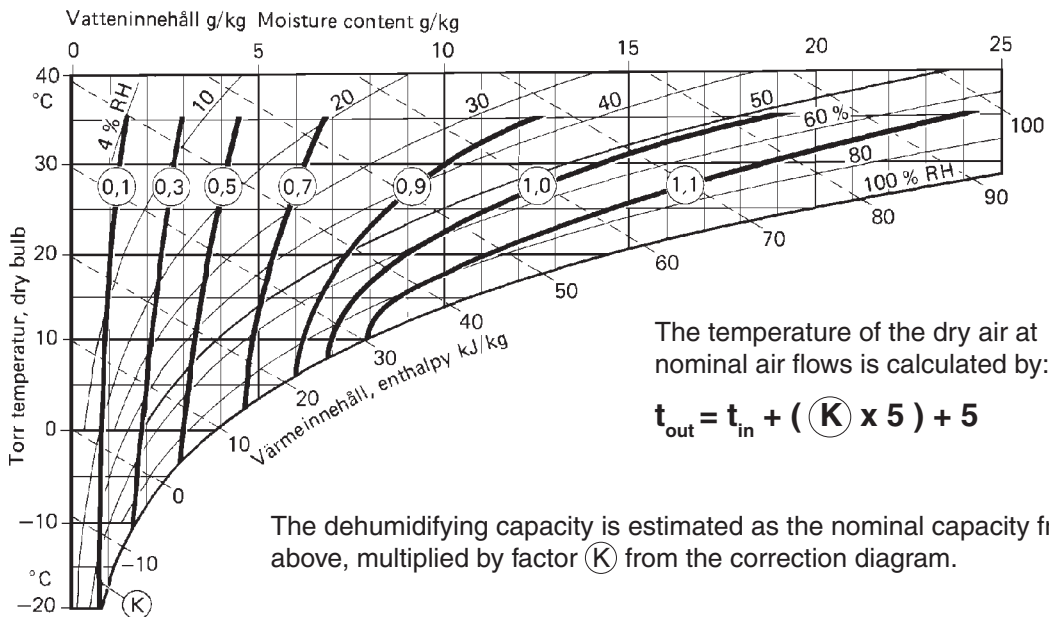

DIMENSIONER

